


# PR-SV-S Type



Servo Power Guide

Valve stand type product for controlling hydraulic cylinders.  
(Product using the existing hydraulic line) High-precision servo valves and dedicated filters are installed.

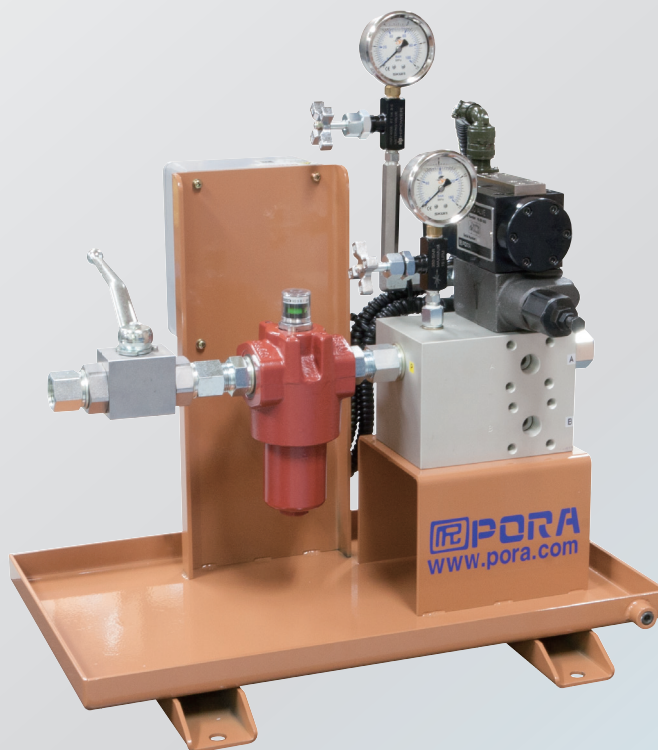

※ The content of this leaflet may be changed without prior notice, for which we request your kind understanding.

## DIMENSION

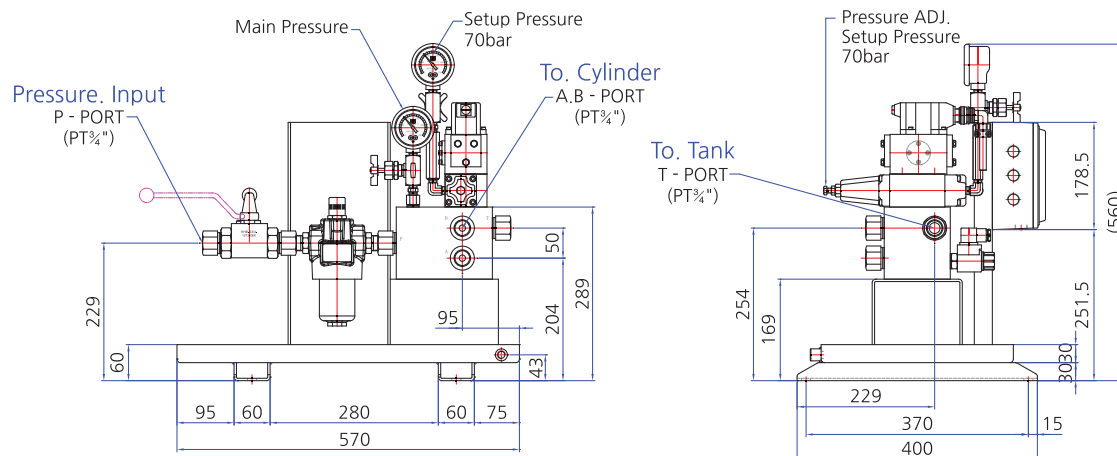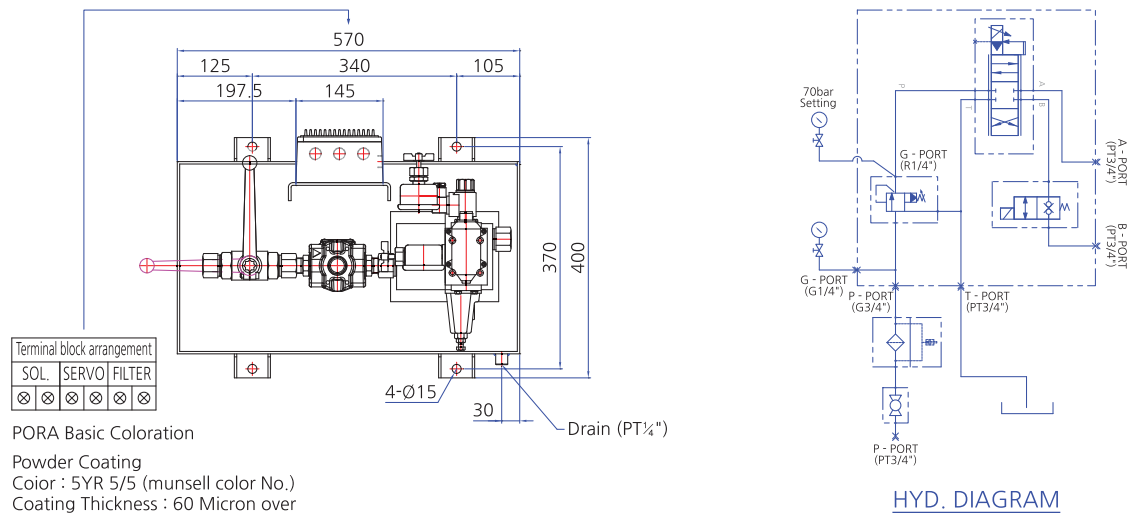

## SPECIFICATIONS

Product Name	PR-SV-SM20-M60S-XX	PR-SV-SM40-M60S-XX	PR-SV-SM60-M60S-XX
Maximum Pressure	210Mpa (210bar)		
Valve Flow Rate	20ℓ /min	40ℓ /min	60ℓ /min
Shutoff valve power (XX)	24: 24Vdc / 11: 110Vac / 22: 220Vac		
Usage Environment Temperature	0 ~ +50℃		
Oil Specification	ISO-VG46 (GS-RANDO #46)		
Weight	25kg		